

[www.ceramique.me](http://www.ceramique.me)



# Alpine Balza

**INTER HOMECARE CO.,LTD.**  
CERAMIQUE

INTER HOMECARE CO.,LTD.  
1768 Debaratana Road  
Bangna Tai,Bangna,Bangkok  
10260  
Tel : +66(0)2746-7122 Fax : +66(0)2746-7324  
[www.ceramique.me](http://www.ceramique.me)  
[www.facebook.com / ceramique.me](https://www.facebook.com/ceramique.me)

**CERAMIQUE**  
Land of Great Ceramic & Tiles



## Alpine Balza




**APN601**

Beige

Sizes:600X600mm

**18** Face

ANTI-SLIP PROPERTIES: R10

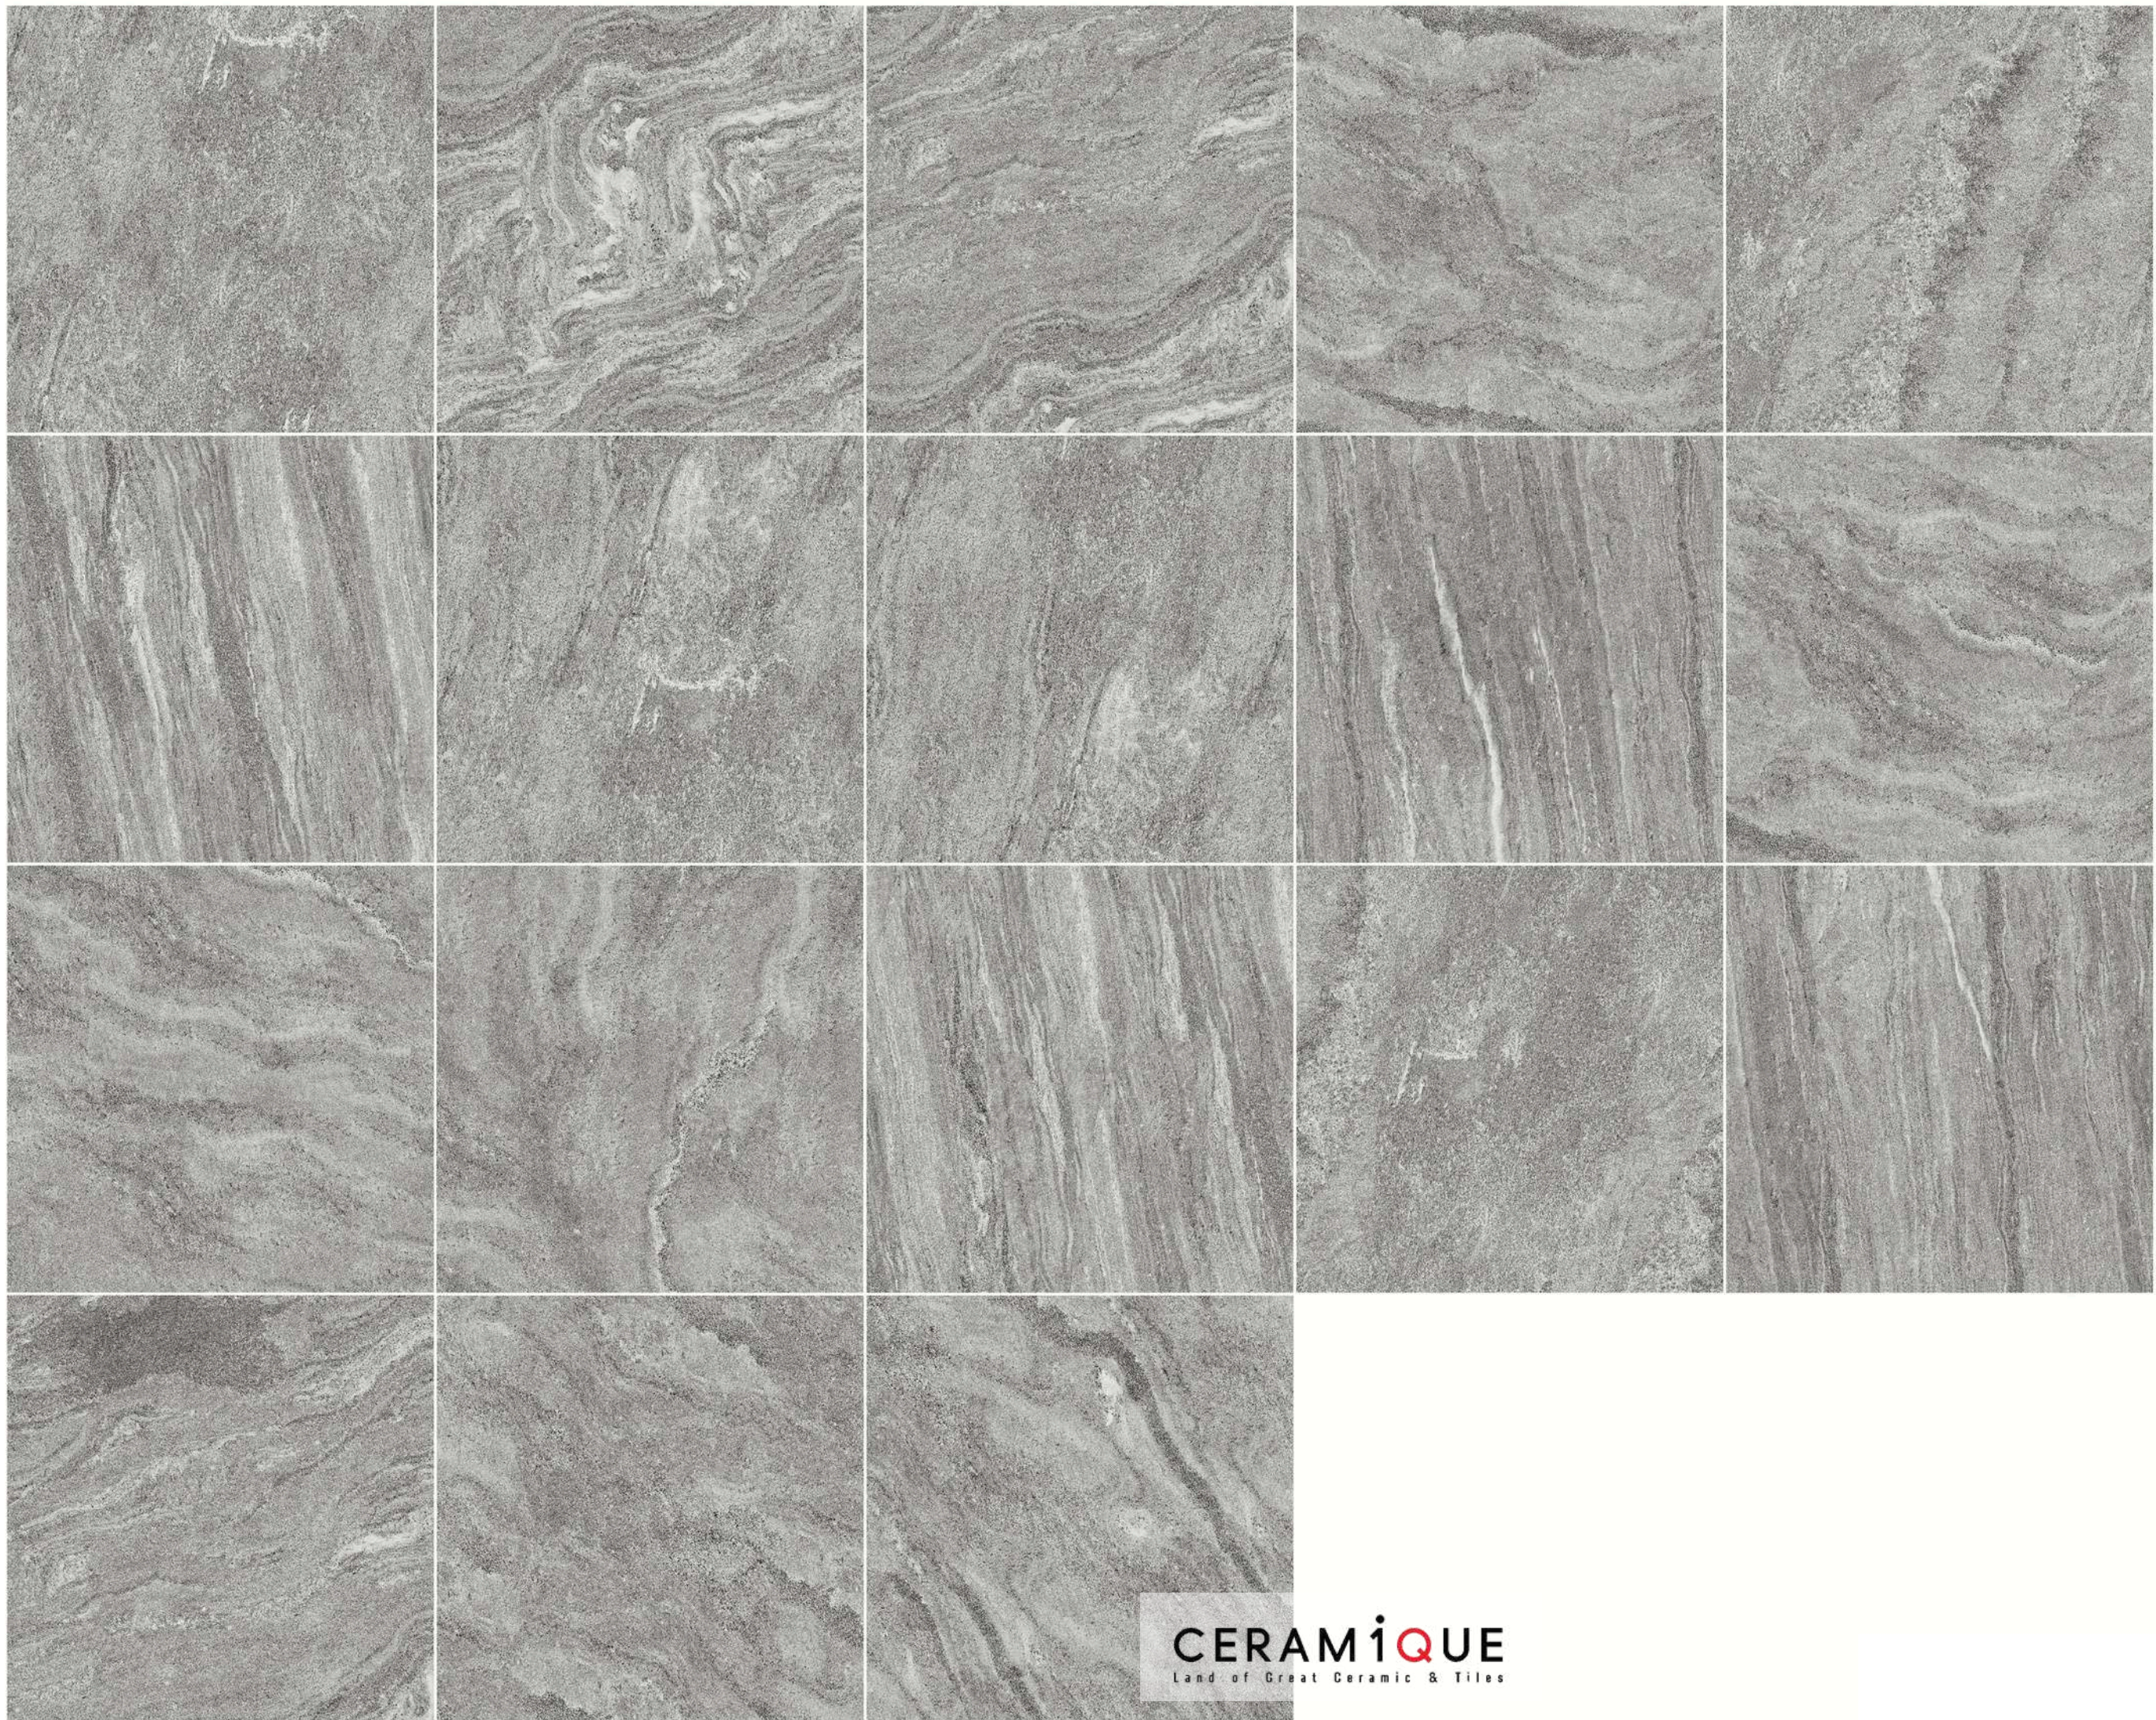

**APN602**

Grey

Sizes:600X600mm

**18** Face

ANTI-SLIP PROPERTIES: R10



**APN603**

Black

Sizes:600X600mm

**18** Face

ANTI-SLIP PROPERTIES: R10

**APN12601**

Beige

Sizes:600X1200mm



**CERAMIQUE**  
Land of Great Ceramic & Tiles

**8** Face

ANTI-SLIP PROPERTIES: R10



**CERAMIQUE**  
Land of Great Ceramic & Tiles

APN12601

**APN12602**

Grey

Sizes:600X1200mm



**CERAMIQUE**  
Land of Great Ceramic & Tiles

**8** Face

ANTI-SLIP PROPERTIES: R10





**CERAMIQUE**  
Land of Great Ceramic & Tiles

APN12602



**APN12603**

Black

Size:600X1200mm

**CERAMIQUE**  
Land of Great Ceramic & Tiles

**8** Face

ANTI-SLIP PROPERTIES: R10

**STROBLHOF**  
ACTIVE FAMILY SPA RESORT



**CERAMIQUE**  
Land of Great Ceramic & Tiles

APN12603



Alpine Balza

# Alpine Balza

Size: 600X600mm

ANTI-SLIP PROPERTIES: R10



APN601

Beige



APN602

Grey



APN603

Black

Size: 600X1200mm

ANTI-SLIP PROPERTIES: R10



APN12601

Beige



APN12602

Grey



APN12603

Black



FLOOR



WALL



FACING SYSTEMS



RESIDENTIAL INDOOR



RESIDENTIAL OUTDOOR



PUBLIC INDOOR



PUBLIC OUTDOOR



HEAVY TRAFFIC

## TECHNICAL TABLE PORCELAIN STONEWARE

CONFORMING TO STANDARDS

EN 14411 ISO 13006 ANNEX G GROUP BIa GL CON Ev ≤ 0.5%

PHYSICAL PROPERTIES	TESTING METHOD	REFERENCE STANDARD	PRODUCT VALUES																												
Sizes	EN ISO 10545-2		<table border="1"> <thead> <tr> <th></th> <th>7cm ≤ N &lt; 15 cm (mm)</th> <th>N ≥ 15 cm (%) (mm)</th> <th>Rectified</th> </tr> </thead> <tbody> <tr> <td>Length and width</td> <td>±0.9</td> <td>±0.6 ±2.0</td> <td>±0.2 %</td> </tr> <tr> <td>Thickness</td> <td>±0.5</td> <td>±5.0 ±0.5</td> <td>±5 %</td> </tr> <tr> <td>Linearity</td> <td>±0.75</td> <td>±0.5 ±1.5</td> <td>±0.2 %</td> </tr> <tr> <td>Wedging</td> <td>±0.75</td> <td>±0.5 ±2.0</td> <td>±0.2 %</td> </tr> <tr> <td>Warpage</td> <td>±0.75</td> <td>±0.5 ±2.0</td> <td>±0.2 %</td> </tr> <tr> <td>Appearance: no visible defects</td> <td>95 % min.</td> <td>95 % min.</td> <td>- 100%</td> </tr> </tbody> </table>		7cm ≤ N < 15 cm (mm)	N ≥ 15 cm (%) (mm)	Rectified	Length and width	±0.9	±0.6 ±2.0	±0.2 %	Thickness	±0.5	±5.0 ±0.5	±5 %	Linearity	±0.75	±0.5 ±1.5	±0.2 %	Wedging	±0.75	±0.5 ±2.0	±0.2 %	Warpage	±0.75	±0.5 ±2.0	±0.2 %	Appearance: no visible defects	95 % min.	95 % min.	- 100%
				7cm ≤ N < 15 cm (mm)	N ≥ 15 cm (%) (mm)	Rectified																									
			Length and width	±0.9	±0.6 ±2.0	±0.2 %																									
			Thickness	±0.5	±5.0 ±0.5	±5 %																									
			Linearity	±0.75	±0.5 ±1.5	±0.2 %																									
			Wedging	±0.75	±0.5 ±2.0	±0.2 %																									
Warpage	±0.75	±0.5 ±2.0	±0.2 %																												
Appearance: no visible defects	95 % min.	95 % min.	- 100%																												
Water absorption %	EN ISO 10545-3	Ev ≤ 0.5%	< 0.1%																												
Modulus of rupture		35 N/mm <sup>2</sup> , individual minimum 32 N/mm <sup>2</sup>	45 N/mm <sup>2</sup>																												
Breaking strength	EN ISO 10545-4	Minimum 1300 N	2500 N (9 mm)																												
Abrasion resistance	EN ISO 10545-6	Maximum 175 mm <sup>3</sup>	Average < 150 mm <sup>3</sup>																												
Thermal expansion coefficient	EN ISO 10545-8	Declared value	6.8 MK <sup>-1</sup>																												
Thermal shock resistance	EN ISO 10545-9	Pass according to iso 10545-1	Resistant																												
Frost resistance	EN ISO 10545-12	Pass according to iso 10545-1	Resistant																												
Resistance to low concentrations of acids and alkali		Declared value	GLA																												
Resistance to high concentrations of acids and alkali	EN ISO 10545-13	Declared value	GHA																												
Resistance to household chemicals and swimming pool salts		UB min.	GA																												
Stain resistance of glazed tiles	EN ISO 10545-14	Declared value	Resistant																												
Friction coefficient (slipperiness)	DIN 51130	Declared value	Declared value																												

	PCS / BOX	M <sup>2</sup> / BOX	KG / BOX	BOX / PALLET	M <sup>2</sup> / PALLET	KG / PALLET
90x180 cm Thick 10.5 mm Natural	01 PC	1,62 M <sup>2</sup>	38,00 KG	54 BOXES	87,48 M <sup>2</sup>	2.072,00 KG.
75x150 cm Thick 10.5 mm Natural	02 PC	2,25 M <sup>2</sup>	52,00 KG	40 BOXES	90,00 M <sup>2</sup>	2.100,00 KG.
80x80 cm Thick 10.5 mm Natural / Ribbed / Antislip	03 PC	1,92 M <sup>2</sup>	45,00 KG	24 BOXES	46,08 M <sup>2</sup>	1.100,00 KG.
60x120 cm Thick 10.5 mm Natural / Ribbed / Antislip	02 PC	1,44 M <sup>2</sup>	36,00 KG	36 BOXES	51,84 M <sup>2</sup>	1.316,00 KG.
60x60 cm Thick 9 mm Natural / Ribbed / Antislip	04 PC	1,44 M <sup>2</sup>	30,00 KG	40 BOXES	57,60 M <sup>2</sup>	1.220,00 KG.
30x60 cm Thick 9 mm Natural / Ribbed / Antislip	08 PC	1,44 M <sup>2</sup>	30,00 KG	40 BOXES	57,60 M <sup>2</sup>	1.220,00 KG.
30x30 cm Thick 9 mm Natural / Ribbed / Antislip	12 PC	1,08 M <sup>2</sup>	22,50 KG	48 BOXES	51,84 M <sup>2</sup>	1.100,00 KG.
60x60 cm OUTDOOR Thick 20 mm Antislip	02 PC	0,72 M <sup>2</sup>	32,00 KG	40 BOXES	28,80 M <sup>2</sup>	1.300,00 KG.
60x120 cm OUTDOOR Thick 20 mm Antislip	01 PC	0,72 M <sup>2</sup>	32,00 KG	36 BOXES	25,92 M <sup>2</sup>	1.172,00 KG.