



TARDIVO

TARDIVO is inspired by EL CAPITAN. After hundreds of thousands of years, it is still as solemn as poetry. Like a thinking giant, it quietly witnessed the turbulent vicissitudes in the world. What always remains unchanged is its tolerance and indifference that after all the years, accommodates everything in the mountains and rivers. Ancestral cliffs, with distinct lines, mountains, waters show their figures one by one in TARDIVO, indifferently and rather calmly, meanwhile, it also contains a torrent of surging.









FEATURES






COLORS:

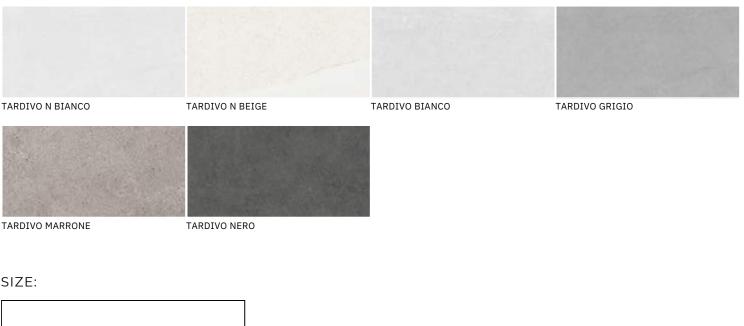

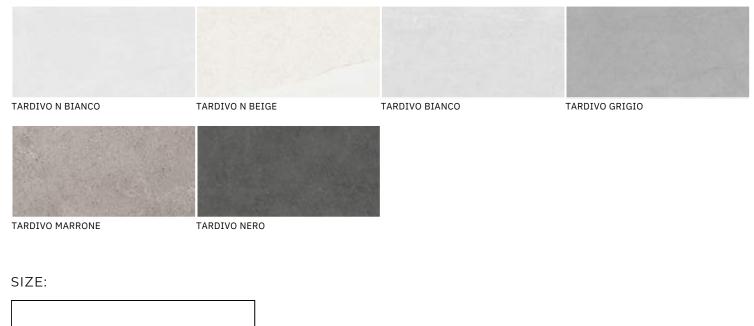





6 different faces


900 X 1800 mm 36" X 72"

600 X 1200 mm 24" X 48"

600 X 600 mm 24" X 24"



TARDIVO N BIANCO

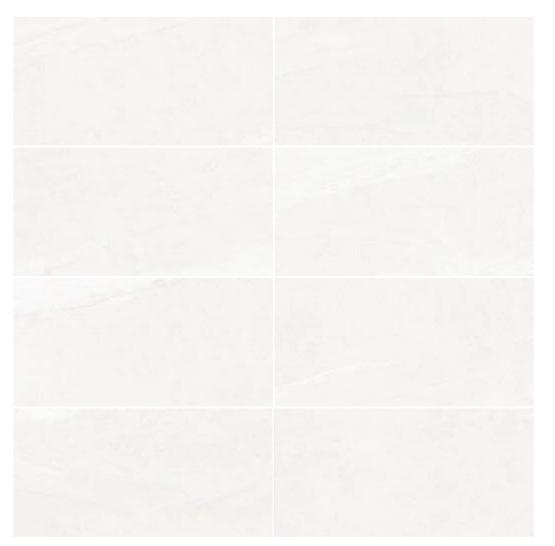

TARDIVO N BIANCO









ALL





TARDIVO N BEIGE



TARDIVO N BEIGE



TARDIVO N BEIGE-M Floor / 600x600MM/24"x24"


0

· (21

-






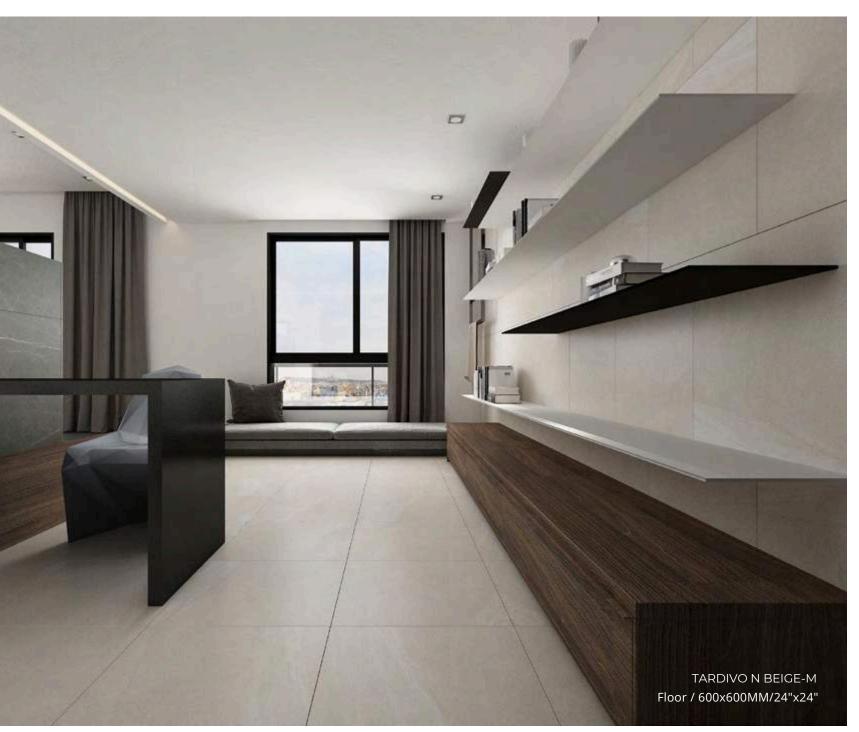




TARDIVO BIANCO

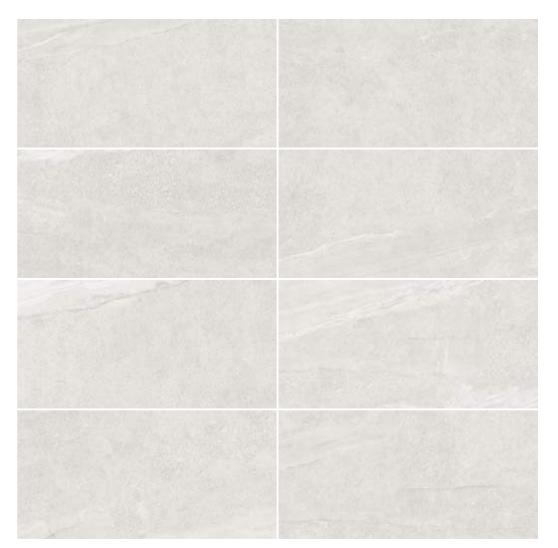

TARDIVO BIANCO





and the

14701-281









TARDIVO GRIGIO



TARDIVO GRIGIO










-





TARDIVO NERO

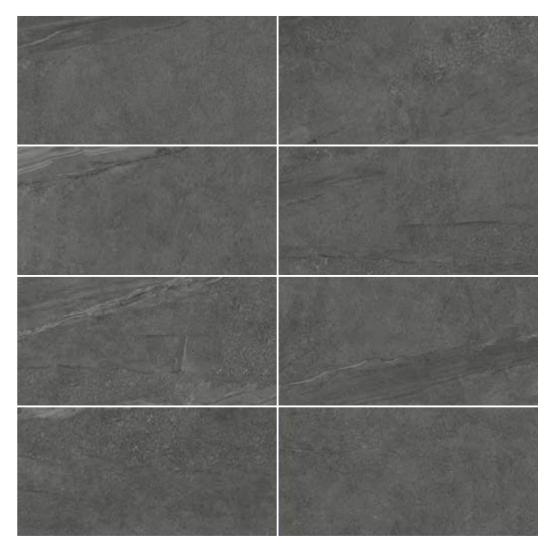

TARDIVO NERO





TARDIVO NERO-M Floor / 600x1200/24"x48"








TARDIVO MARRONE




TARDIVO MARRONE




MOSAIC



MA1N 300X300mm




MA5 326X316mm




MA8 390X310mm



MA11 338X335mm



MA2N 300X300mm







MA9 300X300mm

<u> </u>		
	-11	
<u> </u>		п
	-m	11
		Π


MA12 300X300mm




MA3 300X300mm



MA7 350X305mm





MA10 820X295mm




MA13 300X300mm












MA20 290X290mm




MA15 320X300mm




MA18 330X330mm



MATI 300X300mm



MA16S 330X305mm



MA19 305X300mm

TECHNICAL SPECIFICATION

	DESCRIPTION	STANDARD OF TEST	ISO STANDARD REQUIREMENT	NANOGRESS STANDARD	
	SIZES	ISO 10545.2	LENGTH AND WIDTH ± 0.6% THICKNESS ± 5% EDGE CURVATURE ± 0.5% CENTER CURVATURE ± 0.6% WARPAGE ± 0.5%	± 0.2% ± 2% ± 0.2% ± 0.2% ± 0.2%	
	WATER ABSORPTION	ISO 10545. 3	<i>E</i> ≤0,5%	0.03%	
	STRENGTH	ISO 10545.4	MODULS OF RUPTURER≥35/MM²BREAKING STRENGTHS≥1300N	55N/MM 2 >1700N	
A THE REPORT	SURFACE ABRASION	ISO 10545.7	ACCORDING TO MANUFACTURER'S DATA	MINPEI3	
	COEFFICIENT OF LINEAR THERMAL EXPANSION	ISO 10545.8	TEST METHOD AVAILABLE	6.5X10-6Ċ-1	
	RESISTANCE OF THERMAL SHOCK	ISO 10545.9	TEST METHOD AVAILABLE	GUARANTEED	
	FROST RESISTANCE	ISO 10545. 12	REQUIRED	REQUIRED	
	CHEMICAL RESISTANCE	ISO 10545. 13	MANUF.TO STATE	MANUF.TOSTATE	
	STAIN RESISTANCE	ISO 10545.14	CLASS 3 MIN	CLASS 3 MIN	

PACKING DETAILS

SIZE(mm)	PCS/BOX	M²/BOX	KGS/BOX	BOXES/PALLET	PCS/PALLET	M²/PALLET	KGS/PALLET	BOXES/CNT	M²/CNT	KGS/CNT
600X600 24'X24'	4	1.44	32.50	40	160	57.60	1300	820	1180.80	26880
600X1200 24'X48'	2	1.44	37.50	56	112	80.64	2100	640	921.60	24000
900X1800 36'X72'	2	3.24	62.00	30	60	97.20	1890	420	1360.80	26460



44